



REURINK

ROOFING AND SIDING SALES

REURINK'S MISSION:

To provide top quality roofing solutions with fast, reliable service, while building lasting relationships with our team members and customers.

REURINK'S VALUES

- Start With "YES"
- Assume Positive Intent
- Earn Customer Loyalty Every Day
- Forge Sustainable Growth
- Prioritize Safety Over Everything

Table of Contents

- 1 REURINK'S MISSION / VISION / VALUES
- 2 STANDARD COLOR SELECTION GUIDE
- 3 CRINKLE COLOR SELECTION GUIDE
- 4 5-RIB PANEL & TRIMS
- 8 RX-4 PANEL & TRIMS
- 11 STANDING SEAM & TRIMS
- 15 3/4" CORRUGATED PANELS
- 16 CLASSIC CORRUGATED
- 17 MODERN PLANK & TRIMS
- 19 METAL LAP & TRIMS
- 21 BOARD & BATTEN & TRIMS
- 26 5-V PANEL
- 27 SOFFIT & FASCIA
- 28 FASTENERS
- 29 PIPE BOOTS
- 30 CUPOLAS
- 31 STEEL DOORS
- 32 SLIDING DOOR SYSTEMS
- 33 ACCESSORIES
- 34 TRIM PLACEMENT CHART

FULL-LINE PRODUCT CATALOG 2025

**Metal Roofing
and Siding
Accessories
and Supplies**

Reurink Roofing & Siding Sales

**1243 W. Lincoln Ave. Ionia, MI 48846
616-522-9100 • www.reurinkmetal.com**

v 02/10/25

Color Selection Guide

Standard



Brilliant *



Alamo



Light Stone *



Ivory



Tan



Buckskin



Clay



Burnished Slate *



Brown *



Bright Red



Rustic Red



Burgundy



Zinc



Charcoal *



Black *



Hunter *



Dark Green



Copper Metallic



Ocean Blue



Gallery



Western Rust *



Galvalume *

Note: This guide is for the following panel profiles: 28-GA Classic 5-Rib, RX-4, 3/4 Corrugated, Modern Plant Metal-Lap, Board & Batten, and 5V.


Note: *Also available in 26-GA.

Color Selection Guide

Crinkle



Crinkle Rustic Red

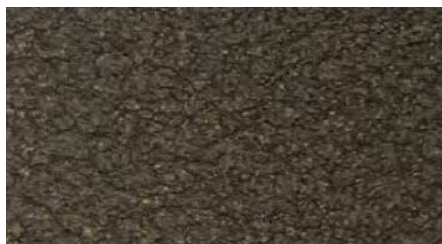

Crinkle Burnished Slate



Crinkle Pebble



Crinkle Hunter Green



Crinkle Black



Crinkle Dark Bronze




Crinkle Brown



Crinkle Aspen



Crinkle Granite

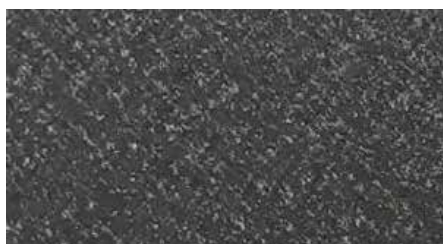

Crinkle Charcoal




Crinkle Brilliant White

Note: This guide is for the following panel profiles: 28-GA Classic 5-Rib, RX-4, 3/4 Corrugated, Modern Plank, Metal-Lap, Board & Batten, and 5V.



Classic 5-Rib Panel

Crafted For The Professional To Last A Lifetime

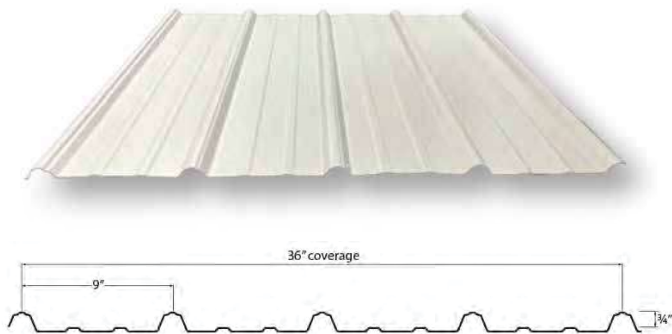

Summary

Classic 5-Rib Panel is versatile and can be used in varying applications, such as residential, commercial, and architectural projects.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 36" Coverage with 3/4" Rib Height
- ✓ Minimum Slope: 3/12

Note: Color selection guides for this panel can be found on page 2 and 3.



WeatherXL



TECHNICAL DATA

- ✓ UL 723 Approved — Meets flame spread and smoke generation requirements for insurance
- ✓ Antimicrobial Material — Polyester and rubber = NO mold or mildew issues
- ✓ Water Absorption Capacity — Holds up to 10 times its weight in water (> 1 quart per 10 square foot)
- ✓ Extremely Resistant — Not susceptible to ripping, tearing or deterioration
- ✓ Adhesion Warranty — Adhesion improves with age and is backed by a 20-year adhesion warranty
- ✓ Durable — Material has been tried and proven (marketed for 15+ years) in every climate condition across the globe.
- ✓ Animal Confinement — Creates another layer of protection from corrosive elements, making it viable for livestock confinement
- ✓ Noise Reduction — Helps reduce rain and reflective noise up to 20%
- ✓ Easy to Clean — With a hose or pressure washer

THE DRIP STOP SOLUTION

When temperature and humidity conditions reach the dewpoint, moisture condenses on the underside of an uninsulated metal roof. If there is a lot of condensation, drops of water form and start to fall, causing damage to the contents below. The traditional method for dealing with condensation is to try to insulate the roof so that the temperature on the panel never reaches the dew point.

The roof panel with DRIPSTOP anti-condensation felt provides a medium for trapping the moisture in the specially designed pockets formed in the membrane. DRIPSTOP holds the moisture until normal dew point conditions return, and the moisture is released back into the air in the form of normal humidity. DRIPSTOP anti-condensation felt is self adhesive and is applied to the metal panel in the roll forming process. As a result, DRIPSTOP arrives at the building site already in place and installs with the roofing panels.


AREAS OF USE

- ✓ Post Frame / Agricultural Buildings — grain and equipment storage, livestock confinement, outbuildings
- ✓ Steel Buildings
- ✓ Self Storage Units
- ✓ Workshops / Detached Garages
- ✓ Open Walled Structures — carports and truck / RV storage


Retrofit or Re-roofing Residential Buildings

Trims


Classic 5-Rib

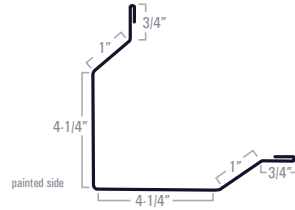


Outside Rake Corner

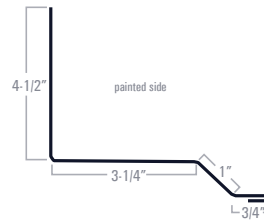


Sidewall




Residential Rake




Residential Eave




Ridge Cap




Z Trim

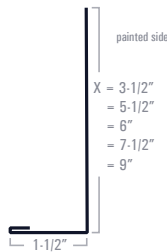


Fascia




J-Trim




Transition Trim




Lower Gambrel




Face Round Track Cover




Rat Guard



Upper Gambrel



Mini Corner/Rake

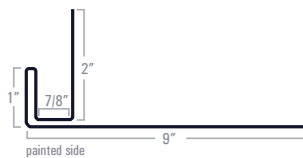

Overhead Door Jamb



Valley Trim

Trims


Classic 5-Rib




Wide Ridge Cap




Flatsheet

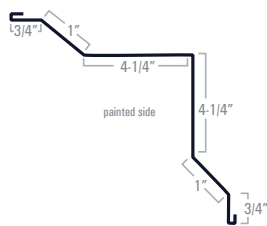


Inside Corner




Corrugated J




F Trim for Soffit




F Trim for Panel



F&J for Soffit

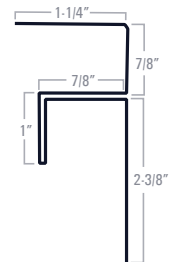

J&J for Panel




Ice Guard



RX-4 Panel

Crafted For The Professional To Last A Lifetime

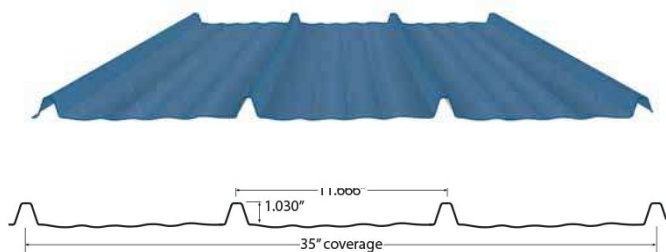

Summary

Reurink's RX-4 Panel is suited for roofing & siding applications. The exposed fastener panel offers a high-end residential look.



WeatherXL

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 35" Coverage with 1.030" Rib Height
- ✓ Minimum Slope: 3/12

Note: Color selection guides for this panel can be found on page 2 and 3.


Trims RX-4




VALLEY TRIM




WIDE VALLEY TRIM



RIDGE CAP




OUTSIDE CORNER RAKE




SIDEWALL




FLATSHEET




RESIDENTIAL RAKE




Z TRIM




RESIDENTIAL EAVE




RAT GUARD




LOWER GAMBREL



UPPER GAMBREL




TRANSITION TRIM




FASCIA


Trims RX-4




LOWER GAMBREL




UPPER GAMBREL




TRANSITION TRIM




SINGLE ANGLE




DJ8 WIDE JAMB TRIM




DJ8 JAMB TRIM




J-TRIM




CUSTOM TRIM



F&J FOR SOFFIT

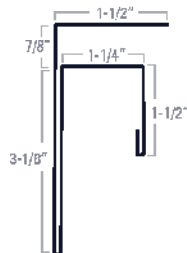

F&J FOR PANEL




SR STANDARD RAIL



Snap Lock

Crafted For The Professional To Last A Lifetime

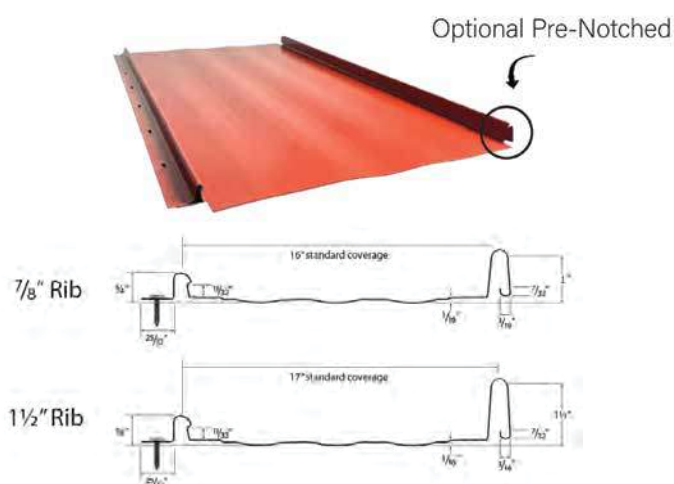

Summary

Snap Lock is designed with a concealed fastener system. Additionally, the panel comes with a pre-notched option which saves contractors installation time on the job site.

Panel Specifications

Thickness

- ✓ 26 Gauge Steel - .0185" Before Paint .0202" After Paint
- ✓ 50,000 PSI

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL
- ✓ Kynar 500 in select colors

Sizing

- ✓ 16" & 17" Coverage with 1" & 1.5" Rib Height
- ✓ Minimum Slope: 3/12



WeatherXL

Note: Color selection guides for this panel can be found on page 12.

Color Selection Guide

26-GA Smooth Colors



Brown



Charcoal



Hunter



Rustic Red



Ocean Blue



Burnished Slate



Burgundy



Black



Galvalume®



Copper Penny

26-GA Crinkle Lifetime



Burnished Slate



Brown



Rustic Red



Hunter Green



Black



Charcoal

24-GA Smooth Colors



Classic Green



Matte Black



Burnished Slate



Mansard Brown



Regal Blue



Colonial Red




Charcoal




Slate Gray

1" Trims

Snap Lock




Hip Cap




Z Trim




Off-Set Cleat




Sidewall




Endwall




Concealed Fastener Rake

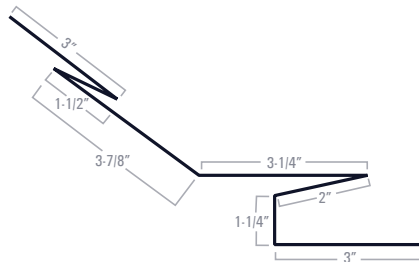


Box Style Endwall

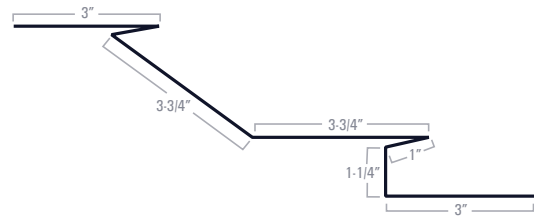


Transition Trim



D-Edge




Valley Trim

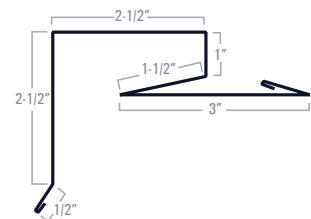


**Box Style
Residential Rake**

1.5" Trims


Snap Lock




Concealed Fastener Ridge




Solid & Vented Z Trim

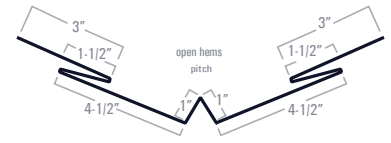


Valley Trim



Sidewall




Endwall




Concealed Fastener Rake



Off-Set Cleat



D-Edge




Transition Trim



3/4" Corrugated

Crafted For The Professional To Last A Lifetime

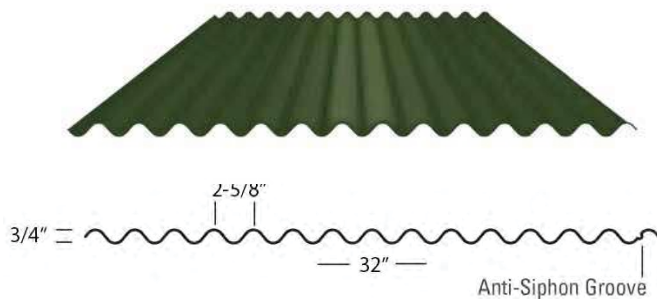

Summary

The 3/4" Corrugated are popular with a modern and contemporary design. The panel is versatile for interior and exterior uses with crinkle and standard color options to choose from.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176"
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 32" Coverage with 3/4" Rib Height
- ✓ Minimum Slope: 3/12



WeatherXL

Note: Color selection guides for this panel can be found on page 2 and 3.



Classic Corrugated

Crafted For The Professional To Last A Lifetime



Summary

The Classic Corrugated (1-1/4 corrugated) is an accent panel that is suited for interior and exterior projects. This panel is great for eye-catching wainscot, dormer accents, bars, kitchen islands and other creative projects.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0145 Thick
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Acrylic Coated Galvalume
- ✓ Painted Available in Select Colors

Sizing


- ✓ 24" Coverage with 1/4" Rib Height
- ✓ Minimum Slope: 3/12



WeatherXL

Modern Plank

Crafted For The Professional To Last A Lifetime

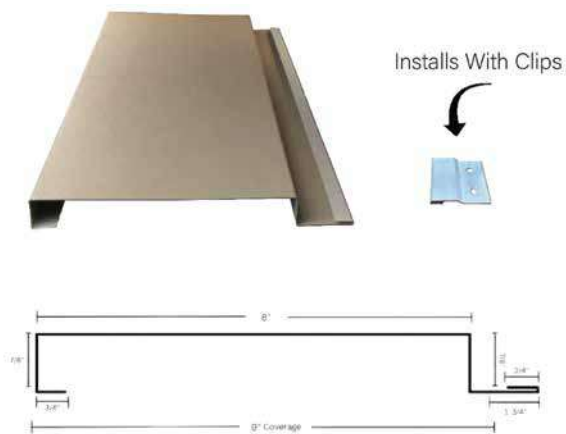

Summary

The modern plank is an accent panel which provides a distinct look to add a modern touch to your project.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 9" Coverage with 7/8" Rib Height


Note: Color selection guides for this panel can be found on page 2 and 3.




WeatherXL

Trims


Modern Plank




Outside Corner




Inside Corner



Open Hem Corner




J-Trim



Double Angle




Drip Cap 1"

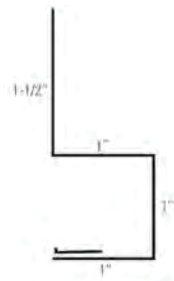

Square Base Trim




Utility Trim



Panel Cap

Metal-lap

Crafted For The Professional To Last A Lifetime

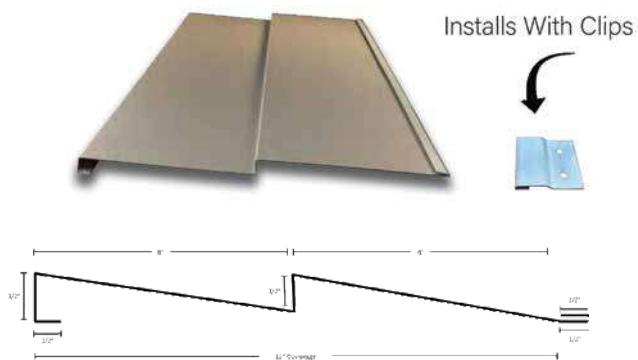

Summary

Metal-lap provides a great alternative to traditional wood siding options and can be used in commercial and residential settings.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 12" Coverage with 1/2" Rib Height


Note: Color selection guides for this panel can be found on page 2 and 3.




WeatherXL

Trims


Metal-lap




Outside Corner



Inside Corner




Open Hem Corner




J-Trim




Double Angle




Drip Cap 1"



Square Base Trim



Utility Trim




Panel Cap



Board and Batten

Crafted For The Professional To Last A Lifetime

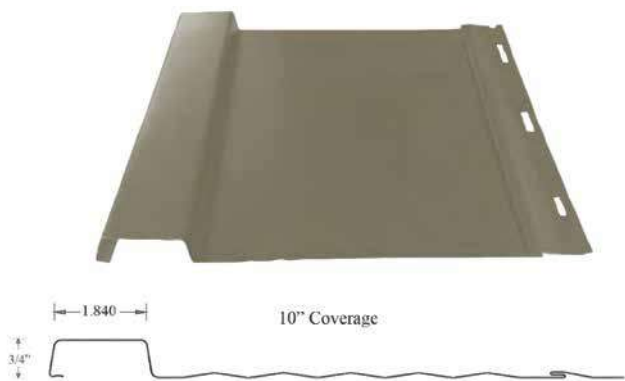

Summary

The Board and Batten panel is a concealed fastener panel that takes place of historically wooden siding, but now boasts the longevity of metal.



WeatherXL

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL


Sizing

- ✓ 10" Coverage with 3/4" Rib Height


Note: Color selection guides for this panel can be found on page 2 and 3.

Trims


Board and Batten



Outside Corner



Inside Corner




Open Hem Corner




J-Trim



Double Angle




Drip Cap 1"



Square Base Trim



Utility Trim




Panel Cap



R-Panel

Crafted For The Professional To Last A Lifetime

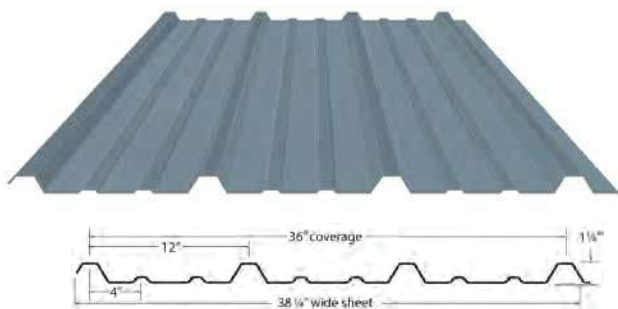

Summary

The popular and versatile R-Panel features a classic look and is used primarily for commercial, post-frame and steel frame building applications.

Panel Specifications

Thickness

- ✓ 26 Gauge Steel - .0185" Before Paint .0202" After Paint
- ✓ 50,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 36" Coverage with 1.25" Rib Height
- ✓ Minimum Slope: 1.5/12

Note: Color selection guides for this panel can be found on page 2 and 3.




WeatherXL

Color Selection Guide

26-GA Lifetime



Brilliant^Δ



Burnished Slate



Light Stone^Δ



Ash Gray



Galvalume



Brown^Δ



Charcoal




Black




Hunter


Trims R-Panel




Rat Guard




Double Angle




Fascia Eave

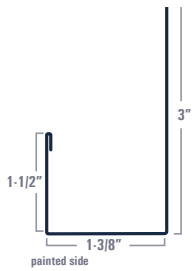


J Trim




Outside Corner

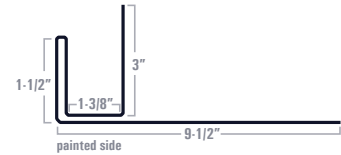


Overhead Door Trim



Sidewall



Formed Ridge Cap



Drip Cap



5-V Panel

Crafted For The Professional To Last A Lifetime

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate



Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 24" Coverage with .75" Rib Height
- ✓ Minimum Slope: 4/12

Note: Color selection guides for this panel can be found on page 2 and 3.

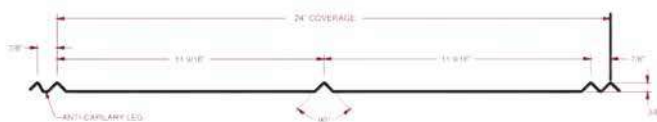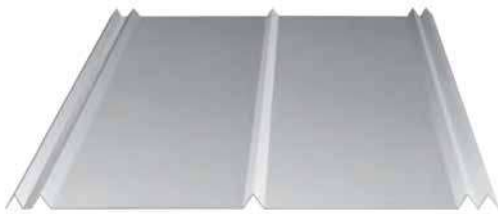


Summary

Reurink's 5-V Panel is suited for interior use. The unique panel is a great accent panel that can add stylish detail to your project.



WeatherXL

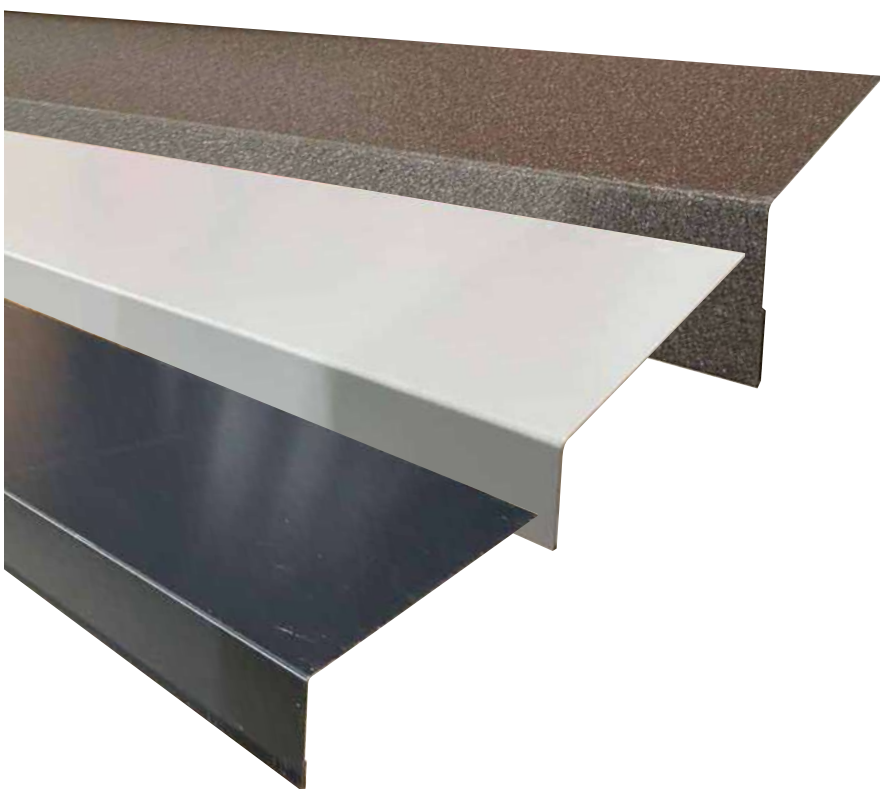

SOFFIT & FASCIA

Specifications

- ✓ Solid and vented steel soffit
- ✓ Custom soffit cuts frp, 11" to 12'
- ✓ 3.5" to 8" fascia widths
- ✓ Over 20 color options

Fasteners


#10-12/24 Woodgrip+ Metal to Wood Fastener



Features and Benefits

- High hex washer head provides driving stability
- Innovative patent-pending point and thread design
- Pierces panel quickly while leaving no metal chips
- Assembled control seal washer
- VistaCoat® premium coating system
- VistaCoat® limited warranty

#12-14 Impax SD3 Metal to Metal Fastener

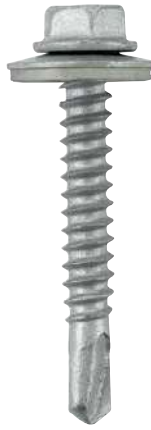

Features and Benefits

- Precision cold-forged point assuring superior strength and the fastest drilling tie performance
- Designed to have low driving and thread engagement torque and provide maximum clamp load
- Fasteners 1" and longer have special long pilot lengths to accommodate nested perlins
- Available with no sealing washer or with bond seal washer
- VistaCoat® premium coating system
- VistaCoat® limited warranty

#10-15 WoodZAC HiLo Metal to Wood Fastener



Features and Benefits

- Zinc alloy cap head that will never red rust
- Limited long life fastener warranty
- High hex washer head provides driving stability
- Type 17 milled point for quick installation
- Assembled with aluminum bond seal washer for a consistent weather-tight seal

Pipe Boots



Summary

Pipe boots are flashing that goes around the base the pipes coming out of our roof and waterproofs them.

Boot Specifications

Standard Boots

Sizes	Temp Rating
1-1/4" - 4"	238 Degrees
3" - 6"	238 Degrees
4" - 7"	238 Degrees
5" - 9"	238 Degrees
6" - 11"	238 Degrees
7" - 13"	238 Degrees
10" - 18"	238 Degrees

High Temp Boots

Sizes	Temp Rating
4" - 7"	392 Degree
7" - 13"	392 Degrees

Split Boots

Sizes	Temp Rating
1/2" - 4"	238 Degrees
3-1/4" - 10"	238 Degrees

Cupolas



Window Cupola

24 x 24" cupola with windows
36 x 36" cupola with windows
48 x 48" cupola with windows



Louver Cupola

24 x 24" cupola with louvers
36 x 36" cupola with louvers
48 x 48" cupola with louvers


- ✓ Prepainted 29 gauge construction
- ✓ Available in Reurink colors
- ✓ All metal edges are hemmed
- ✓ No need to worry about red-rust
- ✓ Bird screen included for mounting in curb
- ✓ Roof and sides interlock for weather-tite connection
- ✓ 24", 36" and 48" shipped knocked-down

Stock Weathervanes

24"	30"	46"
Country Doctor	Buck	Eagle
Eagle	Country Doctor	Horse
Horse	Cow	Rooster
Rooster	Eagle	
	Horse	
	Rooster	





Steel Entry Doors

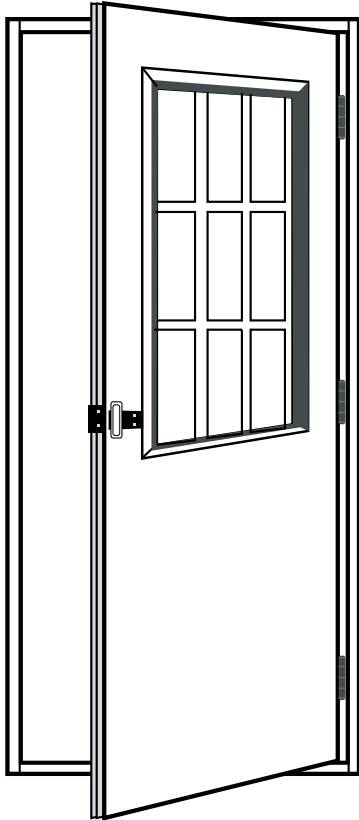

HEAVY DUTY T8 THERMALLY BROKEN DOOR

3068 RIGHT OR LEFT HAND SWING
OPTIONAL 9-LIGHT 22 X 36
ALUMINUM FRAME WINDOW



- Excellent energy savings
- Attractive seamless appearance
- Low maintenance (no painting)
- Durable yet economical
- Full thermal break of jambs, header / threshold and panel
- 16 gauge x 3-1/2" pre-painted jambs
- 24 gauge pre-painted white door panel
- Full perimeter weatherstripping
- Universal 4-way swing
- 3'0" x 6'-8" RO 39-1/4" x 81-1/4"
- 3 fixed pin hinges
- Nylon lockset insert
- Adjustable strike plate
- Prepped for closure

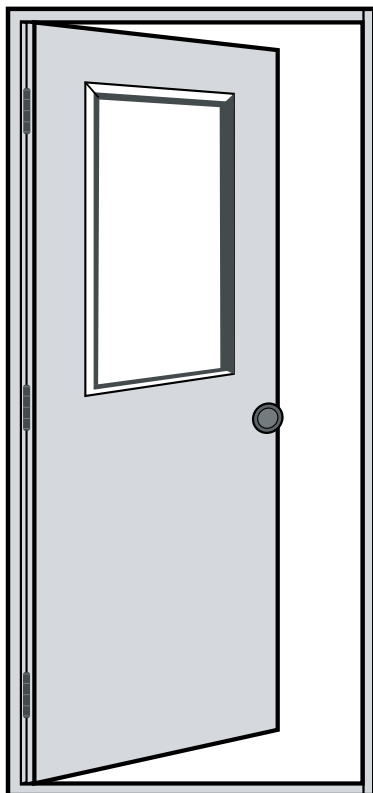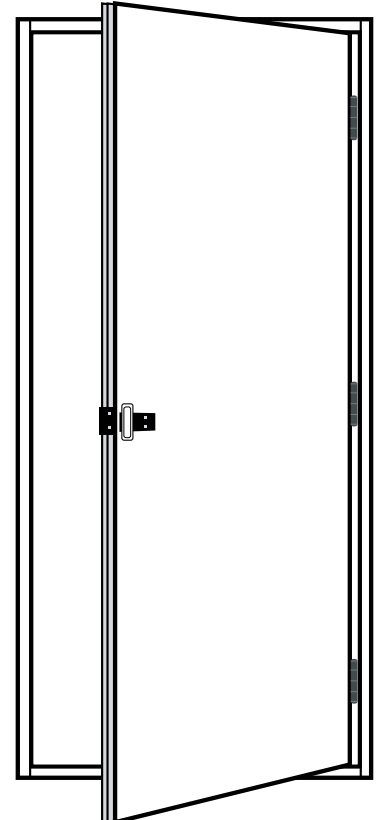

STANDARD AS2 STEEL ENTRY DOOR

RIGHT OR LEFT HAND SWING
OPTIONAL 1-LIGHT 22 X 36 WINDOW

- Full 1-3/4" thick panel
- Wrap-around design gives commercial look to panel
- Pre-hung 4-way universal swing
- Frame has common header/threshold
- 2-3/4" backset standard
- 26 gauge pre-painted white door panel
- Fixed-pin hinges
- Nylon lockset insert
- 16 gauge x 3-1/2" pre-painted jambs
- 3'0" x 6'-8" RO 38-1/4" x 81-1/4"

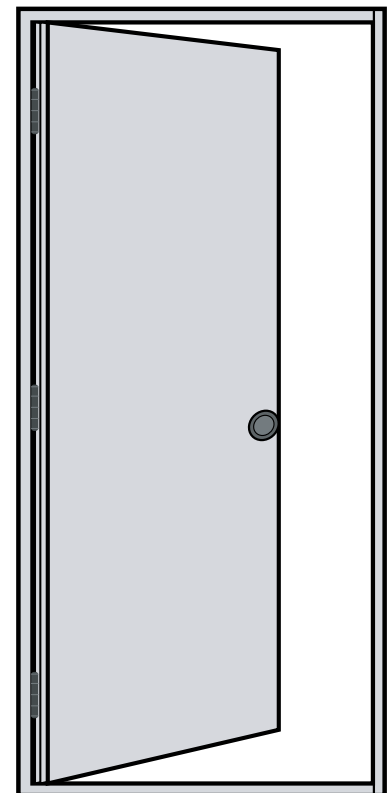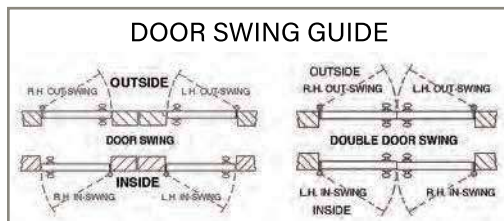

Sliding Door Systems



SIDE RAIL



DOUBLE COUPLE H RAIL



STEEL GIRT



BOTTOM RAIL



BIGG FRAME
BOTTOM RAIL



BIGG FRAME SIDE RAIL



BIGG FRAME
DOUBLE COUPLE H RAIL



KEYHOLE TRACK



STAY GUIDE



CANNONBALL
TROLLIES



CANNONBALL
SPLICE COLLAR



DOUBLE TRACK
BRACKET



CENTER SNUGGER



JAMB LATCH



CANNONBALL
KEEPER STOPPER



TRACK END CAP



OFFSET ADJUSTABLE
STAY ROLLER



LONG FACE MOUNT
TRACK BRACKET



ADJUSTABLE
DOOR STOP



SHORT FACE MOUNT
TRACK BRACKET



JUMBO DOOR HANDLE


Accessories



OUTSIDE FOAM SEALER



EM-SEAL

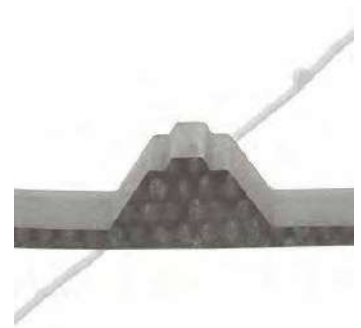

INSIDE FOAM SEALER



RAZOR BACK



BUTYL TAPE 3/8" X 45' ROLL



BUTYL TAPE 1" X 45' ROLL




LP VENT



SOLAR SEAL
COLOR MATCHED CAULK

Trim Placement Chart

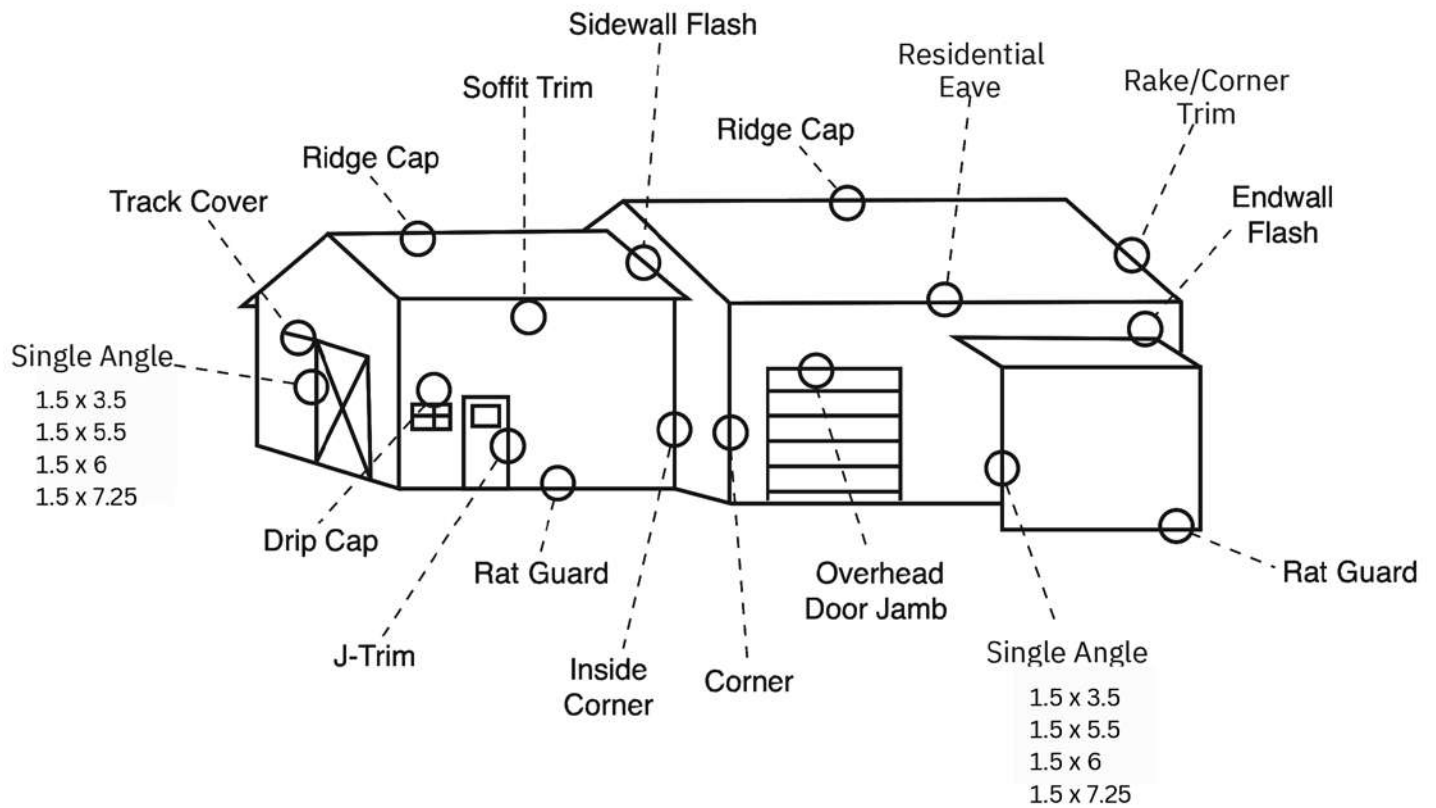

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Reurink Roofing & Siding Sales
1243 W. Lincoln Ave. Ionia, MI 48846
616-522-9100 • www.reurinkmetal.com